


PRESERV 1 - K2D

PRESERV 1 - 300 K2D' is a Fluoro based, UV and weather stable, Black Backsheet and is with low moisture permeation. PRESERV 1- 300 K2D can be used for all Crystalline and many Thin - Film PV modules.

STRUCTURE

1. Primer
2. Adhesive
3. PET
4. Adhesive
5. Fluoro-Based

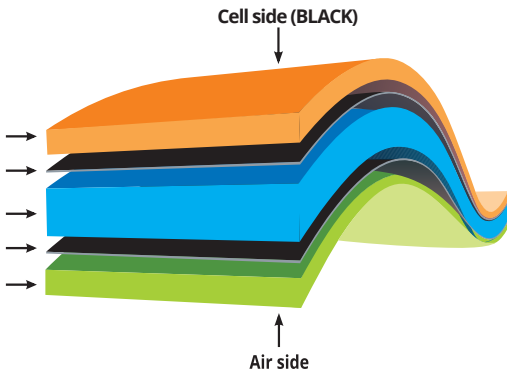

PROPERTIES - PRESERV 1 - 300 K2D

Particulars	Test Method	Unit	Description	Values
Thickness	Micrometre	µm		>360
Width	Scale	mm		Up to 1250
Tensile Strength @ max. load	ASTM D 882	MPa	MD TD	≥100 ≥100
Elongation @ break	ASTM D 882	%	MD TD	≥90 ≥90
Thermal Shrinkage @ 150°C, 30 min.	ASTM D 1204	%	MD TD	≤1.0 ≤0.5
Interlayer Adhesion Strength	ASTM D 903	N/cm	PVDF/PET/ PRIMER	≥5 ≥5
Adhesion Strength with Encapsulant	ASTM D 903	N/cm	Backsheet / EVA	≥100
Moisture Barrier - MVTR @ 38°C, 90% RH	ASTM F 1249	g/(m ² - day)		≤1.5
Reflectance on Cell-side		%		>85
System Voltage	IEC 61730 - 1	VDC		≥1500

Width: Up to 1000 mm - all sizes available. Sizes >1000 mm - make to order

PRESERV 1 - K2D



Packing Unless specified, below is the standard packing of 'PRESERV'

- # Length/Roll: 100 metres | # No. of Rolls/Pallet: 12 or 16
- # Total Linear Metres/Pallet: 1200 or 1600
- # Each roll is sealed in a protective bag
- # Boxes are strapped on suitable pallets
- # No. of joints/supply: 70% Rolls will be joint-free of 180 LM, however, Balance 30% Rolls will be with varied joint-free length between 50 LM-180 LM

Note : The above technical information represents the typical range of properties and is believed to be correct as on date. However, this data should not be used to establish specification limits or used as basis for design. Lamination parameters and Quality of other components of the laminate during module manufacturing impact on the overall performance of the module, and hence we recommend the user to carry out intensive trials to test suitability of this product and module laminating conditions. RenewSys gives no warranty and assumes no liability on connection with any use of this information and is subject to the RenewSys general terms and conditions.

inter
**solar
award**

2018
Finalist

CONSERV®
E 360 - POE
Encapsulant

1 - K2D - 06/2023/2

